

Q Series | Mitsubishi | QX | QY | Q6 | QD | QI | QJ
In Stock | There Tomorrow | RyansElectric.com

Mitsubishi

MELSEC – Q Series Platform



Presented by - RYANS Electric and Supply Company, Inc.

For Product Needs:

Email: sales@RYANSELECTRIC.COM

*Call: **1-800-601-0896***

*Fax: **1-866-611-5442***

<http://www.RYANSELECTRIC.com/>




MITSUBISHI ELECTRIC

Mitsubishi Programmable Controllers

Changes for the Better

MELSEC Q Series

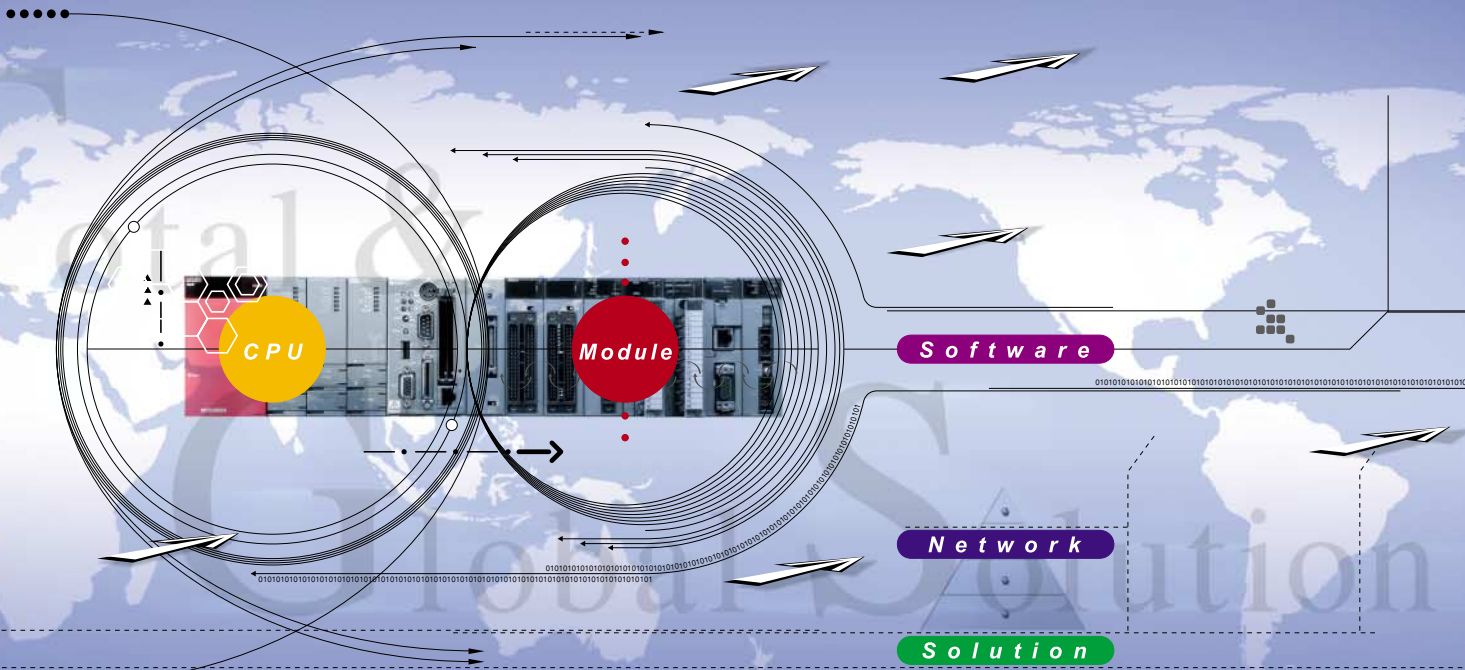

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO14001 (standards for environmental management systems) and ISO9001 (standards for quality assurance management systems).

Empowering Industries



CC-Link



Q Series lineup

CPU Modules

Programmable Controller CPU

Basic Model QCPU

CPU type	Program capacity	Number of I/O points
Q00JCPU	8k steps	256 points
Q00CPU	8k steps	1024 points
Q01CPU	14k steps	1024 points

High Performance Model QCPU

CPU type	Program capacity	Number of I/O points
Q02CPU	28k steps	4096 points
Q02HCPU	28k steps	4096 points
Q06HCPU	60k steps	4096 points
Q12HCPU	124k steps	4096 points
Q25HCPU	252k steps	4096 points

Process CPU

CPU type	Program capacity	Number of I/O points
Q12PHCPU	124k steps	4096 points
Q25PHCPU	252k steps	4096 points

Redundant CPU

CPU type	Program capacity	Number of I/O points
Q12PRHCPU	124k steps	4096 points
Q25PRHCPU	252k steps	4096 points

Motion CPU

CPU type	Number of control axes
Q172HCPU (-T)	8 axes
Q173HCPU (-T)	32 axes
Q172CPUN (-T)	8 axes
Q173CPUN (-T)	32 axes


Network/Information Processing Modules

- **MES Interface Module**
QJ71MES96
- **Ethernet Modules**
QJ71E71-100
QJ71E71-B5
QJ71E71-B2
- **MELSECNET/H Modules**
QJ71LP21-25 QJ72LP25-25
QJ71LP21S-25 QJ72LP25G(E)
QJ71LP21G(E) QJ72BR15
QJ71BR11
MELSECNET/H PC I/F Boards
Q80BD-J71LP21-25
Q80BD-J71LP21S-25
Q80BD-J71LP21G(E)
Q80BD-J71BR11
- **CC-Link/LT Module**
QJ61CL12
- **Serial Communication Modules**
QJ71C24N
QJ71C24N-R2
QJ71C24N-R4
- **FL-net (OPCN-2) Interface Modules**
QJ71FL71-T-F01
QJ71FL71-B5-F01
QJ71FL71-B2-F01
- **AS-i Master Module**
QJ71AS92
- **Intelligent Communication Modules**
QD51
QD51-R24
- **CC-Link Module**
QJ61BT11N
CC-Link PC I/F Board
Q80BD-J61BT11N


Intelligent Function Modules

- **Analog Modules**
A/D Converter Modules
Q64AD-GH Q68AD-G
Q62AD-DGH Q66AD-DG
Q64AD
Q68ADV
Q68ADI
D/A Converter Modules
Q62DA-FG Q68DAVN
Q62DAN Q68DAIN
Q64DAN Q66DA-G
- **Loop Control Module**
Q62HLC
- **Positioning Modules**
QD75P1 QD75MH1
QD75P2 QD75MH2
QD75P4 QD75MH4
QD75D1 QD75M1
QD75D2 QD75M2
QD75D4 QD75M4
QD70P4 QD72P3C3
QD70P8
QD70D4
QD70D8
- **Temperature Control Modules**
Q64TCTT
Q64TCTTBW
Q64TCRT
Q64TCRTBW
- **Channel Isolated Pulse Input Module**
QD60P8-G
- **Temperature Input Modules**
Q64TDV-GH
Q64TD
Q68TD-G-H01
Q64RD-G
Q64RD
- **High Speed Counter Modules**
QD62
QD62D
QD62E
QD63P6
QD64D2


Power Supply Modules




Q61SP
[Slim type]
100 to 240V AC input
5V DC, 2A output




Q61P
100 to 240V AC input
5V DC, 6A output



Q62P
100 to 240V AC input
5V DC, 3A output
24V DC, 0.6A output




Q63P
24V DC input
5V DC, 6A output



Q64PN
100 to 240V AC input
5V DC, 8.5A output




Q63RP
24V DC input
5V DC, 8.5A output



Q64RP
100 to 120/ 200 to 240V AC input
5V DC, 8.5A output

Memory Cards



SRAM cards
Q2MEM-1MBS
Q2MEM-2MBS

Flash cards
Q2MEM-2MBF
Q2MEM-4MBF

ATA cards
Q2MEM-8MBA
Q2MEM-16MBA
Q2MEM-32MBA

PC card adapter
Q2MEM-ADP



Accessories

- **Batteries**
Q6BAT
Q7BAT (-SE1)
Q8BAT (-SE1)
Q2MEM-BAT (for SRAM memory card)
- **Connectors for I/O Modules**
40-pin connector type
A6CON1 (soldering type)
A6CON2 (crimp-contact type)
A6CON3 (IDC type)
A6CON4 (soldering and inclined insertion combination type)
- **37-pin D-sub connector type**
A6CON1E (soldering type)
A6CON2E (crimp-contact type)
A6CON3E (IDC type)
- **DIN Rail Adapter**
Q6DIN1
Q6DIN2
Q6DIN3
- **Spring Clamp Terminal Block**
Q6TE-18S
- **IDC Terminal Block Adapter, Dedicated Tool**
Q6TA32
Q6TA32-TOL
- **Connection Cable**
QC30R2
- **Connector Disconnection Prevention Holder**
Q6HLD-R2

Input Modules

Points	100 to 120V AC	100 to 240V AC	24V DC (positive common)	48V AC/DC (positive/negative common)	5/12V DC (positive/negative common)	24V DC (negative common)
8 points		QX28	QX48Y57 ^{*1}			
16 points	QX10		QX40 QX40-S1 QX41 QX41-S1 QH42P ^{*1} QX41Y41P ^{*1}	QX50	QX70	QX80
32 points					QX71	QX81
64 points			QX42 QX42-S1		QX72	QX82 QX82-S1

*1: Input specifications for I/O composite module

Output Modules

Points	Relay 24V DC, 240V AC	Triac 100 to 240V AC	Transistor 12 to 24V DC (sink)	Transistor 5 to 24V DC (sink/source)	Transistor 5 to 12V DC (sink)	Transistor 12 to 24V DC (source)
7 points			QX48Y57 ^{*2}			
8 points	QY18A			QY68A		
16 points	QY10	QY22	QY40P QY50		QY70	QY80
32 points			QY41P QH42P ^{*2} QX41Y41P ^{*2}		QY71	QY81P
64 points			QY42P			

*2: Output specifications for I/O composite module

Base Units, Extension Cables

● **Slim Type Main Base Unit**

Main base unit
(Power supply module required; cannot be extended)

2 I/O slots
Q32SB

3 I/O slots
Q33SB

5 I/O slots
Q35SB

● **Main Base Unit**

Main base unit
(Power supply module required; can be extended)

3 I/O slots
Q33B

5 I/O slots
Q35B

8 I/O slots
Q38B

12 I/O slots
Q312B

8 I/O slots
Q38RB (Redundant power main base)

Extension base unit
(Power supply module required; can be extended)

3 I/O slots
Q63B

5 I/O slots
Q65B

8 I/O slots
Q68B

12 I/O slots
Q612B

8 I/O slots
Q68RB (Redundant type extension base)

Extension base unit
(Power supply module not required; can be extended)

2 I/O slots
Q52B

5 I/O slots
Q55B

Redundant type extension base unit
(Power supply module required; can be extended; for redundant CPU system)

5 I/O slots
Q65WRB

* Only the slim type power supply module (Q61SP) cannot be mounted.
* This does not support the process CPU or redundant CPU.
* Only Q68RB or Q5□B can be used as a redundant power extension base unit.
* The redundant CPU occupies two slots (CPU slot + I/O slot).
* The slim type power supply module (Q61SP) cannot be mounted.
* Q65WRB for the first extension base stage and Q68RB for the second to seventh extension base stage only.

Other Modules

- **Interrupt Module**
QI60
- **Blank Cover**
QG60

MELSOFT

GX Developer
MELSEC programmable controller programming software

GX Simulator
MELSEC programmable controller simulation software

GX Explorer
Maintenance tool

GX Converter
Excel/text data converter

GX Configurator
Intelligent function module setting/monitoring tool

GX Remote Service-I
Remote access tool

PX Developer
Process control FBD software package

MT Developer
Q-motion integrated startup support software

MR Configurator
Servo setup software

MX Component
ActiveX® library for communication

MX Sheet
Excel communication support tool

M Modules

Modules




Assorted function modules to match every control application.



Comprehensive range of I/O and intelligent function modules.

Q Series includes a comprehensive range of I/O and intelligent function modules to meet the needs of a diverse range of applications. As well as standard digital and analog I/O types (including channel isolated analog), also available are motion control, serial communications, temperature controllers, temperature inputs, etc. Therefore realizing a solution ideal for the application, be it high speed positioning or highly accurate temperature control.

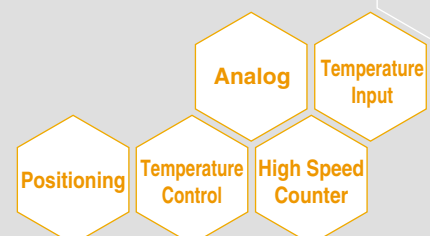

Analog Modules

Analog to Digital Converter Modules

- Channel isolated type**
 - Q64AD-GH • 4ch • Voltage/current input, high resolution
 - Q62AD-DGH • 2ch • With signal conditioning function, high resolution
 - Q68AD-G • 8ch • Voltage/current input
 - Q66AD-DG • 6ch • With signal conditioning function
- Channel non-isolated type**
 - Q64AD • 4ch • Voltage/current input
 - Q68ADV • 8ch • Voltage input
 - Q68ADI • 8ch • Current input

Digital to Analog Converter Modules

- Channel isolated type**
 - Q62DA-FG • 2ch • Voltage/current output (With output monitor)
 - Q66DA-G • 6ch • Voltage/current output
- Channel non-isolated type**
 - Q62DAN • 2ch • Voltage/current output
 - Q64DAN • 4ch • Voltage/current output
 - Q68DAVN • 8ch • Voltage output
 - Q68DAIN • 8ch • Current output

Temperature Control Modules

- Q64TCTT • 4ch • Thermocouple input
- Q64TCTTBW • 4ch • Thermocouple input
 - With wire break detection function
- Q64TCRT • 4ch • Platinum RTD input (3-wire type)
- Q64TCRTBW • 4ch • Platinum RTD input (3-wire type)
 - With wire break detection function

Temperature Input Modules

- Channel isolated type**
 - Q64TDV-GH • 4ch • Thermocouple/micro voltage input
 - Q64TD • 4ch • Thermocouple input
 - Q68TD-G-H01 • 8ch • Thermocouple input **NEW**
 - Q64RD-G • 4ch • Platinum/nickel RTD input (3/4-wire type)
- Channel non-isolated type**
 - Q64RD • 4ch • Platinum RTD input (3/4-wire type)

Loop Control Module

- Q62HLC • 2ch input • Thermocouple/micro voltage/voltage/current input, current output

Positioning Modules

- Open collector output type**
 - QD70P4 • 4 axes • 200kpps • No. of positioning data: 10/axis
 - QD70P8 • 8 axes • 200kpps • No. of positioning data: 10/axis
 - QD75P1 • 1 axis • 200kpps • No. of positioning data: 600/axis
 - QD75P2 • 2 axes • 200kpps • No. of positioning data: 600/axis
 - QD75P4 • 4 axes • 200kpps • No. of positioning data: 600/axis
- Differential driver output type**
 - QD70D4 • 4 axes • 4Mpps • No. of positioning data: 10/axis
 - QD70D8 • 8 axes • 4Mpps • No. of positioning data: 10/axis
 - QD75D1 • 1 axis • 1Mpps • No. of positioning data: 600/axis
 - QD75D2 • 2 axes • 1Mpps • No. of positioning data: 600/axis
 - QD75D4 • 4 axes • 1Mpps • No. of positioning data: 600/axis
- SSCNET III connection type**
 - QD75MH1 • 1 axis • No. of positioning data: 600/axis
 - QD75MH2 • 2 axes • No. of positioning data: 600/axis
 - QD75MH4 • 4 axes • No. of positioning data: 600/axis
- SSCNET connection type**
 - QD75M1 • 1 axis • No. of positioning data: 600/axis
 - QD75M2 • 2 axes • No. of positioning data: 600/axis
 - QD75M4 • 4 axes • No. of positioning data: 600/axis
- Open collector output type with built-in counter function**
 - QD72P3C3 • 3 axes • 100kpps • No. of positioning data: 1/axis
 - 3-channel counter, 100kpps

Channel Isolated Pulse Input Module

- QD60P8-G • 8ch • 30kpps • 5/12 to 24V DC input
 - With pre-scale function

High Speed Counter Modules

- QD62 • 2ch • 200kpps • 5/12/24V DC input • Transistor output (sink)
- QD62D • 2ch • 500kpps • Differential driver input • Transistor output (sink)
- QD62E • 2ch • 200kpps • 5/12/24V DC input • Transistor output (source)
- QD63P6 • 6ch • 200kpps • 5V DC input
- QD64D2 • 2ch • 4Mpps • Differential driver input • Transistor output (sink) **NEW**

Interrupt Module

- QI60 • 24V DC input, 16 points

Input Module

- Selectable input response time for DC input module.
 - *This excludes QX50.

Output Module

- Some types of transistor output modules include short-circuit protection.

Partner product • Absolute position detection unit

Refer to page 46 for details on the partner product.




A wide range of application specific intelligent modules

A range of analog modules ideal for process control applications.

Optimum isolated analog modules for process control

- Channel isolated high resolution analog-digital converter module **Q64AD-GH**
- Channel isolated high resolution analog-digital converter module (with signal conditioning function) **Q62AD-DGH**
- Channel isolated high resolution digital-analog converter module **Q62DA-FG**


The channel isolated analog modules are specifically designed for process control applications by offering high accuracy conversion combined with high isolation voltage. Flowmeter, pressure gauge, etc. can be directly connected to the analog input, and control valve to the analog output. Also, hardware and installation costs are substantially reduced because an external isolation amplifier is no longer required. Used together with a general purpose controller, a low cost process control solution is easily realized.

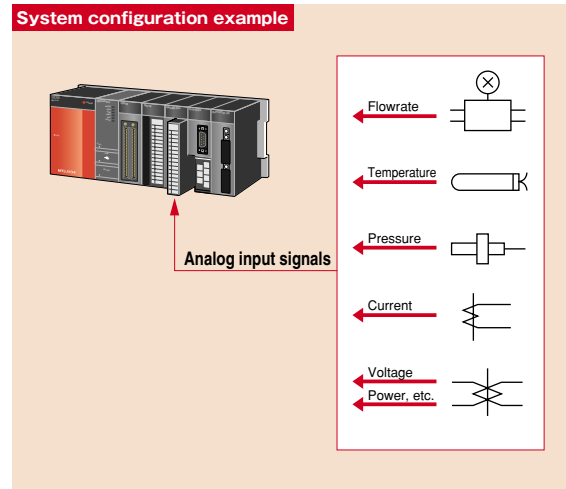

Cost effective channel isolated analog modules

- Channel isolated analog-digital converter module **Q68AD-G**
- Channel isolated analog-digital converter module (with signal conditioning function) **Q66AD-DG**
- Channel isolated digital-analog converter module **Q66DA-G**


Either 6 or 8 channels available per module, realizing a more cost effective solution. Also, error detection such as upper/lower limit warning, and engineering value conversion are available without programs.

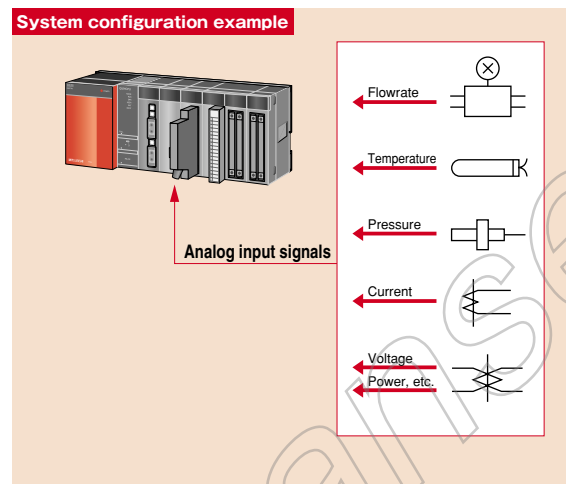

Analog modules for control applications that require high speed conversion

- Analog-digital converter module ... **Q64AD, Q68ADV, Q68ADI**
- Digital-analog converter module **Q62DAN, Q64DAN, Q68DAVN, Q68DAIN**


A diverse range of analog modules are available for both A/D and D/A conversion. These high-speed conversion modules are suited for connection to various automation products, such as servo amplifiers and inverters, therefore providing a highly accurate solution. For the Q62DAN, Q64DAN, Q68DAVN, and Q68DAIN modules, isolating the analog output channel from the external power supply will permit stable analog outputs even if noise occurs. This isolation will also improve operation stability and prevent module internal failures caused by incorrect wiring.

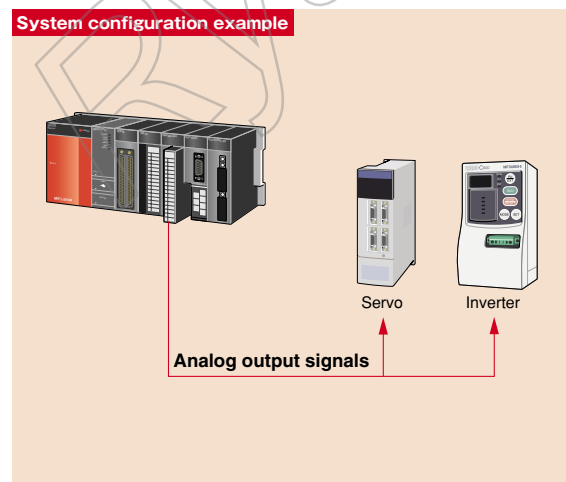

Temperature control modules that realize PID loop control

- Temperature control module **Q64TCTT (BW), Q64TCRT (BW)**


Q Series offers a range of dedicated PID temperature loop controllers. These modules include their own PID control loops that act independently of the main CPUs. This allows a system to realize higher performance by diverting some control tasks from the main processor(s), freeing them up to take care of other control tasks. The temperature control modules offer compatibility with thermocouples and RTDs. A broken wire detection feature is also available.

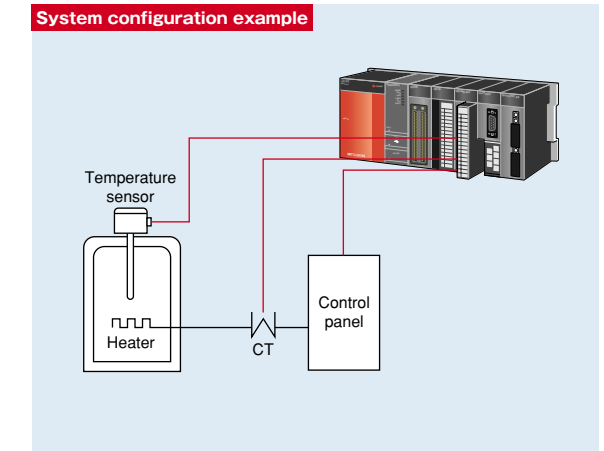

High accurate temperature input modules

- Channel isolated thermocouple input module **Q64TDV-GH** (Thermocouple input, micro voltage input)
- Channel isolated thermocouple input module **Q64TD** (Thermocouple input)
- Channel isolated thermocouple input module **Q68TD-G-H01** (Thermocouple input) **NEW**
- Channel isolated RTD input module **Q64RD-G** (Platinum/nickel RTD input)
- RTD input module **Q64RD** (Platinum RTD input)

Realize temperature data input by connecting a thermocouple, platinum RTD, or nickel RTD. Initial settings and the automatic refresh settings can be made using GX Configurator-TI (temperature input module setting/monitoring tool), reducing the program.

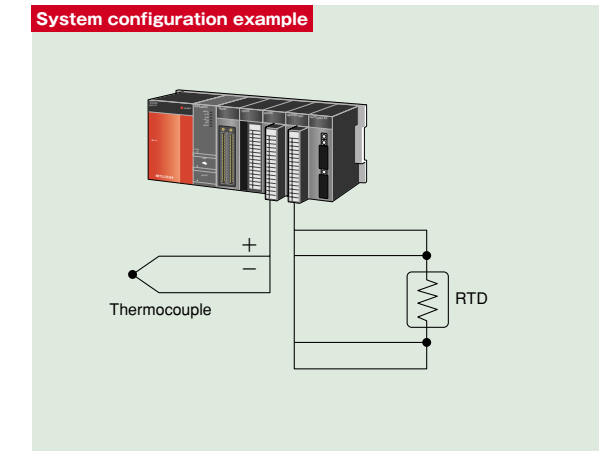


Loop control module ideal for temperature and flow rate control environments which require fast response

- Loop control module **Q62HLC**

With its speed-proportional PID control format and 25ms sampling cycle, the loop control module is well suited for high-precision, high-resolution thermocouple inputs, micro voltage inputs, voltage inputs, current inputs, and current outputs. It is also ideal for sudden temperature change control, pressure control, and flow control applications which require fast response.

- Connectable to JIS, IEC, NBS, ASTM standards compliant thermocouples.
- Permits analog value measurements of various input ranges by using micro voltage, voltage, and current input sensors.
- Offers program control while automatically changing the target values (SV) and PID constants [proportional band (P), integral time (I), derivative time (D)] in a time-specific manner, as well as a cascade control function that permits control with CH1 as the master, and CH2 as the slave.

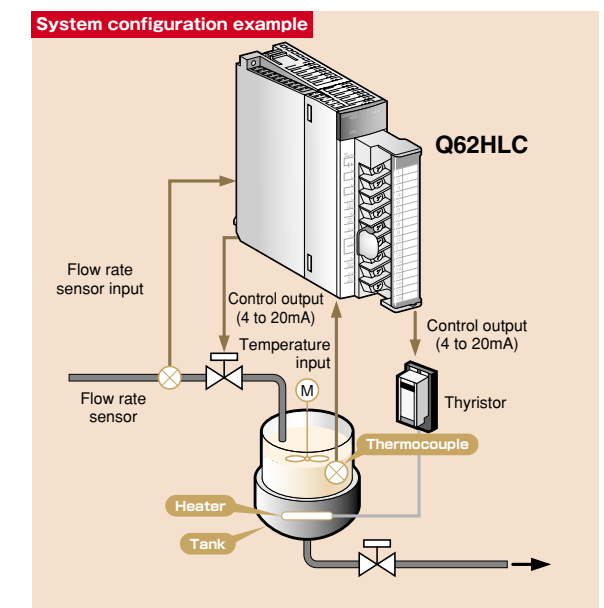



Diverse range of motion control solutions offering compatibility with any drive system.

High speed and accurate positioning control


Various positioning control is supported including 2 to 4-axis linear interpolation, 2-axis circular interpolation, speed control, speed/position changeover, path control and constant speed control. Together with GX Configurator-QP setup software, setting the positioning data, monitoring, and debugging are easier. Also, Q Series leverages the benefits of SSCNET, Mitsubishi's high performance motion control network. This allows Mitsubishi's intelligent digital servos to be connected by a simple daisy chain cable, reducing costs and increasing performance.

◎SSCNET III connection type

- High-speed serial communication SSCNET III connection type ... **QD75MH**

An SSCNET III cable connection both minimizes the required wiring, and permits distances of up to 50m between stations. This format is also compatible with absolute position systems where the home position is established by a data setting type home position return operation. Inputs of upper/lower limit LS and proximity dog Nos. are also possible at the servo amplifier, greatly reducing the required wiring.

System configuration example

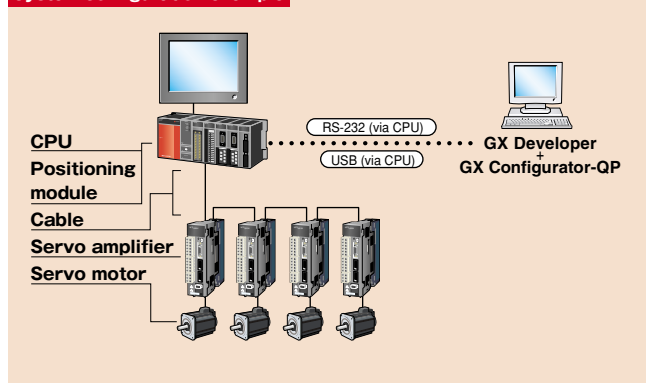


◎SSCNET connection type

- High-speed serial communication SSCNET connection type ... **QD75M**

Using the SSCNET cable connection, ensures wire saving with a maximum 30m cable length. This type is also compatible with the absolute position system which establishes the OP with the data set type OPR method. Wiring for the proximity dog, etc., is no longer required.


System configuration example

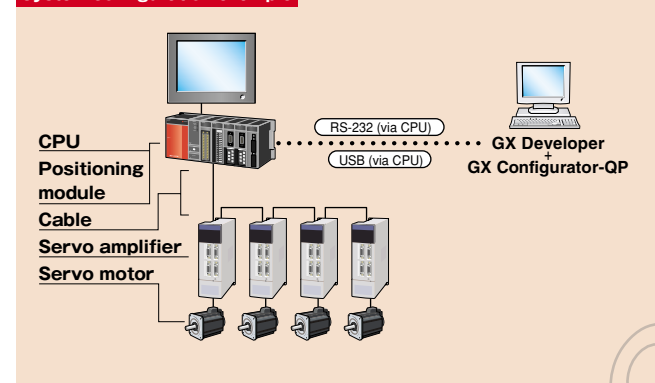

Application example 2 - Sealing

[Function]

- Constant speed pass control
- Linear, circular interpolation
- High-speed, high-accuracy pass control

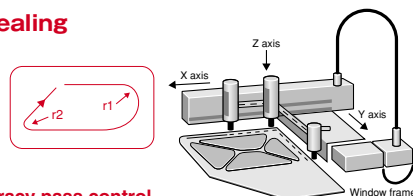


◎Pulse train output type

- Differential driver pulse train output type ... **QD75D**
- Open collector pulse train output type ... **QD75P**

Both open collector and differential driver type positioning modules are available. The distance to the servo amplifier can be extended to 10m using the differential type, with a 1Mpps high-speed communication speed. High-speed, high-accuracy control are realized. (The command pulse with the open collector type is max. 200kpps.)


System configuration example

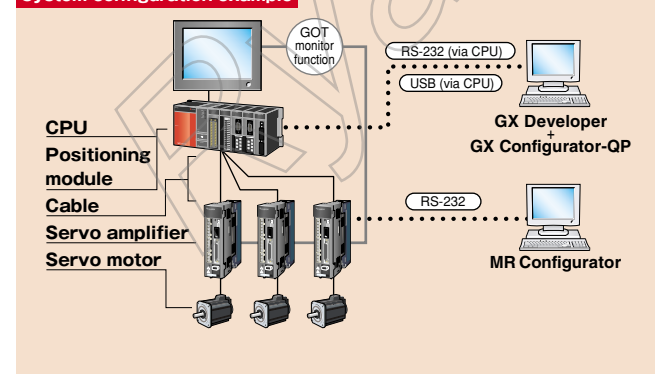

Application example - X-Y table control

[Function]

- 2-axis linear interpolation
- 3-axis linear interpolation
- 2-axis circular interpolation
- Constant speed pass control



Ideal solution for simple multi-axis positioning systems

Satisfying requirements for simple positioning control applications, this module includes functions, such as positioning control, speed control and variable positioning control.

Here is the perfect positioning module for a multi-axis system that does not require complicated control.

- Open collector pulse train output type ... **QD70P**
- Differential output type ... **QD70D**



Control up to 4/8 axes with one module. Acceleration/deceleration is performed smoothly with very little speed fluctuations, therefore ideal for connecting to stepping motors. High-speed processing is carried out at the start of position control.

Item	QD70P	QD70D
Pulse train output format	Open collector output	Differential output
Max. output pulses	200kpps	4Mpps
Max. connection distance between drive modules	2m	10m
Start time	1-axis start	0.1ms
	4-axis start *1	0.2ms
	8-axis start *1	0.4ms

*1: When START signal switches ON within 1 scan. There are no start delays between axes.

Application example

- Stepping motor

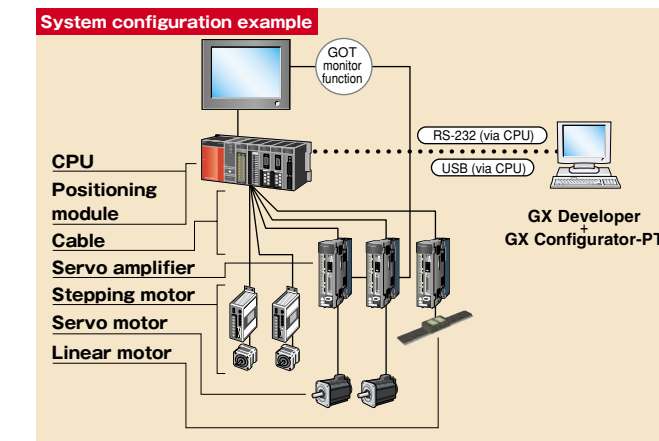


Suitable for conveyor systems and processing machines that require positioning control by confirming encoder inputs

• Open collector output type with built-in counter function

3-axis positioning and 3-channel counter functions are available in a single module. Extra slots can be used efficiently, allowing for more flexible configuration as well as saving space.


Item		QD72P3C3	
Positioning control	Number of axes	3 axes	
	Pulse train output format	Open collector output	
	Max. output pulses	100kpps	
Start time	1-axis start	1ms	
	3-axis start	1ms	
Counter function	Number of channels	3 channels	
	Count input signal	Phase	1-phase input, 2-phase input
		Signal level	18mA at 5V DC, 2 to 6mA at 24V DC
Pulse input	1 multiple of 2 phases, 2 multiple of 2 phases, 4 multiple of 2 phases, CW/CCW		
Counting speed (max.)	100kpps		

System configuration example

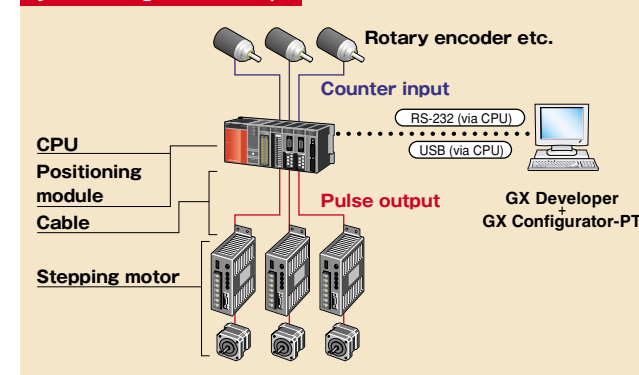

Application example

- Positioning control of conveyor

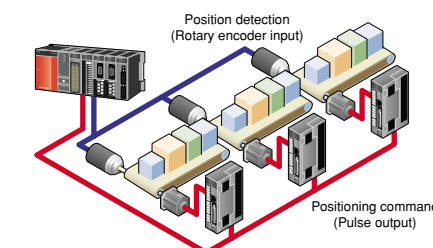



CPU module performance specifications

Programmable Controller CPU

Item	Basic Model			High Performance Model				
	Q00JCPU	Q00CPU	Q01CPU	Q02CPU	Q02HCPU	Q06HCPU	Q12HCPU	Q25HCPU
Control method	Sequence program control method							
I/O control mode	Refresh							
Programming language (sequence control language)	* Relay symbol language (ladder) * Logic symbolic language (list) * MELSAP3 (SFC), MELSAP-L * Structured text (ST)			* Relay symbol language (ladder) * Logic symbolic language (list) * MELSAP3 (SFC), MELSAP-L * Structured text (ST)				
Processing speed (Sequence instruction) ^(Note 1)	LD instruction	200ns	160ns	100ns	79ns	34ns		
	MOV instruction	700s	560ns	350ns	237ns	102ns		
	PC MIX value (instruction/μs) ^(Note 2)	1.6	2.0	2.7	4.4	10.3		
	Floating-point addition	65.5μs	60.5μs	49.5μs	1815ns	782ns		
Total number of instructions ^(Note 3)	318	327		381				
Operation (floating point calculation) instruction	Yes			Yes				
Character string processing instruction	Yes ^(Note 6)			Yes				
PID instruction	Yes			Yes				
Special function instruction (Trigonometric function, square root, exponential operation, etc.)	Yes			Yes				
Constant scan (Function for keeping regular scan time)	1 to 2000ms (set in 1ms units)			0.5 to 2000ms (set in 0.5ms units)				
Program capacity	8k steps		14k steps	28k steps	60k steps	124k steps	252k steps	
Number of I/O device points [X/Y]	2048 points			8192 points				
Number of I/O points [X/Y]	256 points	1024 points		4096 points				
Internal relay [M]	8192 points			8192 points				
Latch relay [L]	2048 points			8192 points				
Link relay [B]	2048 points			8192 points				
Timer [T]	512 points			2048 points				
Retentive timer [ST]	0 points			0 points				
Counter [C]	512 points			1024 points				
Data register [D]	11136 points			12288 points				
Link register [W]	2048 points			8192 points				
Annunciator [F]	1024 points			2048 points				
Edge relay [V]	1024 points			2048 points				
File register [R, ZR]	No	65536 points		32768 points ^(Note 5)	65536 points ^(Note 5)		131072 points ^(Note 5)	
Special link relay [SB]	1024 points			2048 points				
Special link register [SW]	1024 points			2048 points				
Step relay [S]	2048 points			8192 points				
Index register [Z]	10 points			16 points				
Pointer [P]	300 points			4096 points				
Interrupt pointer [I]	128 points			256 points				
Special relay [SM]	1024 points			2048 points				
Special register [SD]	1024 points			2048 points				
Function input [FX]	16 points			16 points				
Function output [FY]	16 points			16 points				
Function register [FD]	5 points			5 points				
Local device	No			Yes				
Device initial values	Yes			Yes				

Note 1) The processing time will not be delayed if the devices are indexed.
 Note 2) The PC MIX value is the average number of instructions, such as basic instructions or data processing instructions, which can be executed in 1μs. The processing speed will rise as the value increases.
 Note 3) The intelligent function module dedicated instructions are not included.
 Note 4) Indicates the number of points in the default state. This can be changed with the parameters.
 Note 5) Indicates the number of points when using the built-in memory (standard RAM).
 This can be expanded with the SRAM card or Flash card. (Writing from the program is not possible when using the Flash card.)
 Up to 1041408 points can be used when using the SRAM card.
 Note 6) The character strings can be used only with the character string data transfer instruction (\$MOV).

Process CPU

Item	Process CPU	
	Q12PHCPU	Q25PHCPU
Control method	Sequence program control method	
I/O control mode	Refresh	
Programming language	Sequence control language	* Relay symbol language (ladder) * Logic symbolic language (list) * MELSAP3 (SFC), MELSAP-L * Structured text (ST)
	Language for process control	Process control FBD ^(Note 2)
Processing speed (Sequence instruction) ^(Note 1)	LD instruction	34ns
	MOV instruction	102ns
	PC MIX value (instruction/μs) ^(Note 3)	10.3
	Floating-point addition	782ns
Total number of instructions ^(Note 4)	415	
Operation (floating point calculation) instruction	Yes	
Character string processing instruction	Yes	
Processing instruction	Yes	
Special function instruction (Trigonometric function, square root, exponential operation, etc.)	Yes	
Constant scan (Function for keeping regular scan time)	0.5 to 2000ms (set in 0.5ms units)	
Program capacity	124k steps	252k steps
Instructions for process control	52 types	
Loop control specifications	Number of control loops	No limit ^(Note 4)
	Control cycle	10ms or more/control loop Setting available per loop
	Main functions	2-degree of freedom PID control, cascade control, auto-tuning function, feed forward control
Number of I/O device points [X/Y]	8192 points	
Number of I/O points [X/Y]	4096 points	
Internal relay [M]	8192 points	
Latch relay [L]	8192 points	
Link relay [B]	8192 points	
Time [T]	2048 points	
Retentive timer [ST]	0 points	
Counter [C]	1024 points	
Data register [D]	12288 points	
Link register [W]	8192 points	
Annunciator [F]	2048 points	
Edge relay [V]	2048 points	
File register [R, ZR]	131072 points ^(Note 7)	
Special link relay [SB]	2048 points	
Special link register [SW]	2048 points	
Step relay [S]	8192 points	
Index register [Z]	16 points	
Pointer [P]	4096 points	
Interrupt pointer [I]	256 points	
Special relay [SM]	2048 points	
Special register [SD]	2048 points	
Function input [FX]	16 points	
Function output [FY]	16 points	
Function register [FD]	5 points	
Local device	Yes	
Device default values	Yes	

Note 1) The processing time will not be delayed if the devices are indexed.
 Note 2) PX Developer is required for programming by FBD.
 Note 3) The PC MIX value is the average number of instructions, such as basic instructions or data processing instructions, which can be executed in 1μs. The processing speed will rise as the value increases.
 Note 4) The intelligent function module dedicated instructions are not included.
 Note 5) The number of control loops is restricted by the combination of the device memory capacity (128 words/loop used) and the control cycle.
 Note 6) Indicates the number of points in the default state. This can be changed with the parameters.
 Note 7) Indicates the number of points when using the built-in memory (standard RAM).
 This can be expanded with the SRAM card or Flash card. (Writing from the program is not possible when using the Flash card.)
 Up to 1041408 points can be used when using the SRAM card.



Redundant CPU

Item		Redundant CPU	
		Q12PRHCPU	Q25PRHCPU
Control system		Sequence program control method	
I/O control		Refresh mode	
Programming language	Sequence control language	<ul style="list-style-type: none"> Relay symbol language (ladder) Logic symbolic language (list) MELSAP3 (SFC) Structured text (ST) 	
	Process control language	<ul style="list-style-type: none"> Process control FBD (Note 1) 	
Instruction types		Sequence, basic, application and process control instructions (Process control instruction types: Control/Operation instructions, I/O control instructions, compensation operation instructions, arithmetic operation instructions, comparison operation instructions, auto-tuning instructions)	
Loop control specifications	Control cycle	10ms or more/control loop (Setting available per loop)	
	Number of control loops	No limit (Note 2)	
Main functions		2 degree of freedom PID control, cascade control, auto-tuning function, feed forward control	
RAS	Online module replacement	The I/O, analog, temperature input, temperature control, and pulse input modules can be replaced (on a remote I/O station).	
	Output in case of error stop	Clear or output retention can be designated for each module.	
Functions compatible with redundant system		<ul style="list-style-type: none"> Redundant configuration of the entire system, including the CPU, the power supply, and the base unit Large-capacity data tracking Network system compatible with redundant system Engineering environment (GX Developer) Communication with programming tools Online program change function Memory copy function Redundant system setting 	
Communication port		USB, RS-232	
Modules that can be mounted on the main base unit		Q Series network module (Ethernet, MELSECNET/H, CC-Link only), input/output module can be mounted.	
Programming software		GX Developer PX Developer	
Program capacity	Number of steps	124k steps	252k steps
	Number of programs	124	252 (Note 3)
Device memory capacity (Note 5)		Device memory: 29k words / File register (internal): 128k words (It can be expanded up to 1017k words by adding a memory card [2MB].)	
Number of I/O device points (Note 6)		8192 points	
Number of I/O points (Note 7)		4096 points	
Number of CPUs mounted		1 (Multiple CPU configuration is not available)	
Number of mountable modules		11 on the main base unit (7 when the power supply is redundant type)	
Number of extension base		0 (All non-redundant modules are mounted on the remote I/O station [the maximum number of modules that can be mounted on a remote station is 64].)	
Number of remote I/O points		8192 points (up to 2048 points per station)	

Note 1) PX Developer is required for programming by FBD.
 Note 2) The number of control loops is restricted by the combination of the device memory capacity (128k words/loop used) and the control cycle.
 Note 3) The maximum number of files that can be executed is 124. It is impossible to execute 125 or more files. Two SFC/MELSAP-Ls are available, one of which is a program execution control SFC.
 Note 4) The standard RAM, standard ROM and program memory can be copied from the control system to the standby system. The memory card cannot be copied.
 Note 5) Each number of device points in the data memory can be changed within 29k words, depending on the parameters.
 Note 6) Total number of the I/O points on the main base unit, which are directly controlled from the CPU module, and the I/O points controlled as remote I/O by the remote I/O network.
 Note 7) The number of I/O points on the main base unit, which are directly controlled from the CPU module.

Motion CPU

Item		Q173HCPU (-T)	Q172HCPU (-T)	Q173CPUN (-T)	Q172CPUN (-T)
Number of control axes	SV13/SV22/SV43	32 axes	8 axes	32 axes (Max. of 16 axes x 2 per system)	8 axes
	SV54	—	—	16 axes (Max. of 4 axes per machine)	8 axes (Max. of 4 axes per machine)
Operation (Note 1) cycle (default)	SV13	0.44ms / 1 to 3 axes	0.44ms / 1 to 3 axes	0.88ms / 1 to 8 axes	0.88ms / 1 to 8 axes
		0.88ms / 4 to 10 axes		1.77ms / 9 to 16 axes	
	SV22/SV43	1.77ms / 11 to 20 axes	0.88ms / 4 to 8 axes	3.55ms / 17 to 32 axes	1.77ms / 5 to 8 axes
		3.55ms / 21 to 32 axes		7.11ms / 25 to 32 axes	
SV54	0.88ms / 1 to 5 axes	—	0.88ms / 1 to 4 axes	3.55ms / 1 to 8 axes	
	1.77ms / 6 to 14 axes		7.11ms / 9 to 16 axes		
Interpolation functions		Linear interpolation (Up to 4 axes), Circular interpolation (2 axes), Helical interpolation (3 axes)			
Control method		PTP (Point To Point) control, Speed control, Speed/position switching control, Fixed-pitch feed, Constant-speed control, Position follow-up control, Prescribed position stop speed control (Q173HCPU(-T) / Q172HCPU(-T)), Speed switching control, High-speed oscillation control, Synchronous control (SV22)			
Acceleration/deceleration control		Trapezoidal acceleration/deceleration, S-curve acceleration/deceleration, Post-interpolation acceleration/deceleration (SV54)			
Compensation function		Backlash compensation, Electronic gear, Phase compensation (SV22)		Backlash compensation, Electronic gear	
Programming tool	SV13/SV22	Motion SFC, Dedicated instruction, Mechanical support language (SV22)			
	SV43	EIA language (G-code)			
	SV54	Robot language (MELFA-BASIC IV [Lite])			
Servo program (dedicated instruction) capacity	SV13/SV22	14k steps			
	SV43	248KB			
	SV54	Capacity of 1 program file: Max. 64KB Total capacity of all program files: Max. 339KB			

Item		Q173HCPU (-T)	Q172HCPU (-T)	Q173CPUN (-T)	Q172CPUN (-T)
Number of programs (SV54)		Max. 255			
Number of positioning points	SV13/SV22	3200 points (positioning data can be set indirectly)			
	SV43	Approx. 10600 points (indirect setting possible)			
	SV54	Internal variables: 1022 points / program External variables: 40 points (Indirect setting possible; position type [pose], or joint type [Joint] format)			
Programming tool		IBM PC/AT			
Peripheral I/F		USB / SSCNET		USB / RS-232 / SSCNET	
Teaching function		Provided (when using Q17□HCPU-T / Q17□CPUN-T, SV13/SV54)			
Home position return function		Proximity dog type (2 types), Count type (3 types), Data set type (2 types), Dog cradle type, Stopper type (2 types), Limit switch combined type			
Jog operation function		Function present (with incremental feed function [SV54])			
Manual pulse generator operation function		Possible to connect 3 modules			
Synchronous encoder operation function		Possible to connect 12 modules (SV22 use)	Possible to connect 8 modules (SV22 use)	Possible to connect 12 modules (SV22 use)	Possible to connect 8 modules (SV22 use)
M-code function		M-code output function provided, M-code completion wait function provided			
Limit switch output function		Number of output points: 32 points			
ROM function		Yes		No	
Absolute position system		• Made compatible by setting battery to servo amplifier (Possible to select the absolute/incremental data method for each axis)			
Number of controlled machines (SV54)	Axis control machines	8 machines			
	Management machines	8 machines			
WAIT function (SV54)		With "Waiting for WAIT status" function, and "Device type/No. specific output during WAIT" function			
Number of Motion related modules		Q172LX: 4 modules Q172EX-S2: 6 modules (Note 2) Q173PX: 4 modules (Note 3)	Q172LX: 1 module Q172EX-S2: 4 modules (Note 1) Q173PX: 3 modules (Note 2)	Q172LX: 4 modules Q172EX: 6 modules (Note 1) Q173PX: 4 modules (Note 2)	Q172LX: 1 module Q172EX: 4 modules (Note 1) Q173PX: 3 modules (Note 2)
Program capacity	Code total (Motion SFC diagram + Operation control + Transition)	543KB		287KB	
	Test total (Operation control + Transition)	484KB		224KB	
Number of I/O (X/Y) points		8192 points			
Number of real I/O (PX/PY) points		256 points			
Number of devices	Internal relays (M)	Total (M+L): 8192 points			
	Latch relays (L)				
	Link relays (B)	8192 points			
	Annunciators (F)	2048 points			
	Special relay (M)	256 points			
	Data registers (D)	8192 points			
	Link registers (W)	8192 points			
	Special register (D)	256 points			
	Motion registers (#)	8192 points			
	Coasting timers (FT)	1 point (888μs)			

Note 1) SV43 is not used at Q172EX and Q172EX-S2.
 Note 2) The incremental synchronous encoder use (SV22). When connecting the manual pulse generator, you can use only one module.

GENERAL SPECIFICATIONS

General specifications indicate the environmental specifications in which this product can be installed and operated. Unless otherwise specified, the general specifications apply to all products of the Q Series. Install and operate the Q Series products in the environment indicated in the general specifications.


Item	Specifications	
Operating ambient temperature	0 to 55°C	
Storage ambient temperature	-25 to 75°C (Note 3)	
Operating ambient humidity	5 to 95%RH (Note 4), non-condensing	
Storage ambient humidity	5 to 95%RH (Note 4), non-condensing	
Vibration resistance	Under intermittent vibration	
	Frequency	5 to 9 Hz
	Acceleration	9.8m/s ²
	Amplitude	3.5mm (0.14 in.)
	Under continuous vibration	
	Frequency	5 to 9 Hz
Acceleration	4.9m/s ²	
Amplitude	1.75mm (0.069 in.)	
Shock resistance	Conforms to JIS B 3502, IEC61131-2 (147m/s ² , 3 times in each of 3 directions X, Y, Z)	
Operating atmosphere (Note 5)	No corrosive gases	
Operating altitude	2000m (6565 ft.) or less	
Installation location	Inside control panel	
Overvoltage category (Note 1)	II or less	
Pollution degree (Note 2)	2 or less	
Equipment class	Class I	

Note 1) This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within premises. Category II applies to equipment for which electrical power is supplied from fixed facilities. The surge voltage withstand level for up to the rated voltage of 300 V is 2500 V.
 Note 2) This index indicates the degree to which conductive material is generated in the environment where the equipment is used. In pollution degree 2, only non-conductive pollution occurs. However, a temporary conductivity caused by condensation is to be expected.
 Note 3) The storage ambient temperature is -20 to 75°C if the system includes the A/AnS Series modules.
 Note 4) The operating ambient humidity and storage ambient humidity are 10 to 90%RH if the system includes the A/AnS Series modules.
 Note 5) Do not use or store the programmable controller under pressure higher than the atmospheric pressure of altitude 0 m. Doing so can cause a malfunction. When using the programmable controller under pressure, please consult your local Mitsubishi sales office or representative.

Ensuring an extensive global support network meeting diverse support for today's needs

Complying with international quality assurance standards.

All of Mitsubishi Electric's FA component products have acquired the international quality assurance "ISO9001" and environment management system standard "ISO14001" certification. Mitsubishi's products also comply with various safety standards, including UL Standards, and shipping standards.

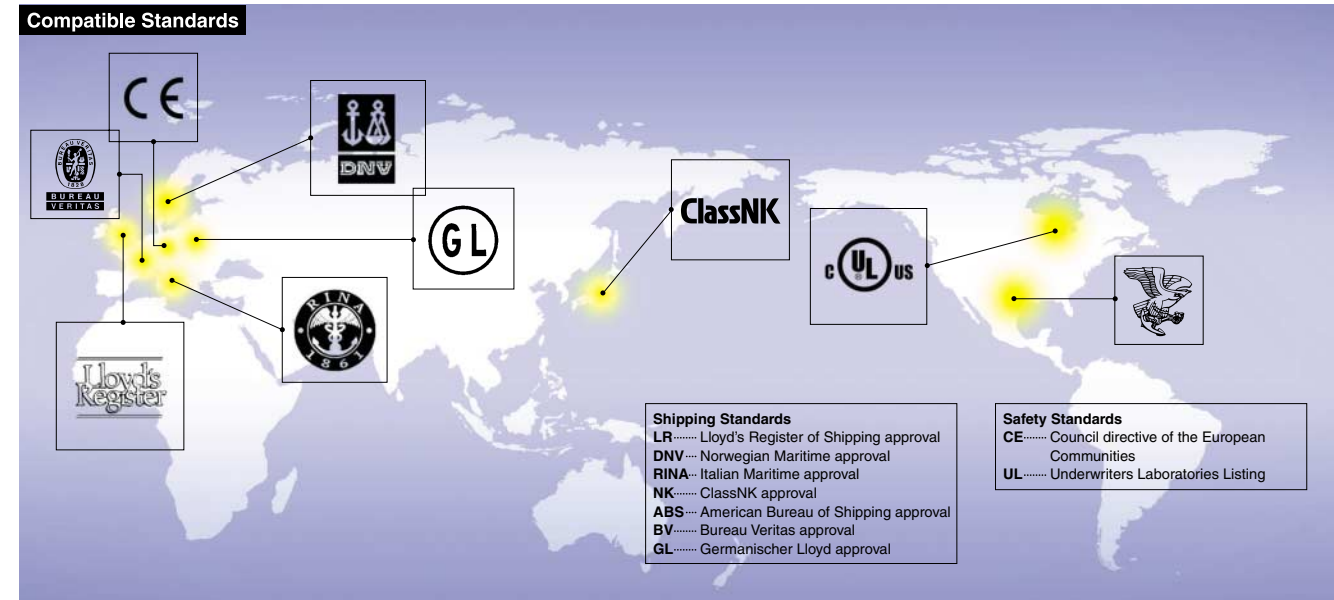

Global FA centers

"Mitsubishi Global FA Centers" are located throughout North America, Europe, and Asia to develop products complying with international standards and to provide attentive services.

North American FA Center

MITSUBISHI ELECTRIC AUTOMATION, INC.
 500 Corporate Woods Parkway, Vernon Hills, IL 60061, USA
 Tel: +1-847-478-2100 / Fax: +1-847-478-0327
 Area covered: North America, Mexico, Chile, Brazil

European FA Center

MITSUBISHI ELECTRIC EUROPE B.V. GERMAN BRANCH (Industrial Automation Division)
 Gothaer Strasse 8, D-40880 Ratingen, Germany
 Tel: +49-2102-486-0 / Fax: +49-2102-486-1120
 Area covered: Europe

UK FA Center

MITSUBISHI ELECTRIC EUROPE B.V. UK BRANCH (Customer Technology Center)
 Travellers Lane, Hartfield, Hertfordshire, AL10 8XB, UK
 Tel: +44-1707-276100 / Fax: +44-1707-278695
 Area covered: UK, Ireland

Central and Eastern Europe FA Center

MITSUBISHI ELECTRIC EUROPE B.V. CZECH BRANCH
 Radlická 714/113a, 15800 Praha 5, Czech Republic
 Tel: +420-251-551-470 / Fax: 420-251-551-471
 Area covered: Czech Republic, Poland, Hungary, Slovakia

Korean FA Center

MITSUBISHI ELECTRIC AUTOMATION KOREA CO., LTD.
 B1F, 2F, 1480-6, Gayang-Dong, Gangseo-Ku, Seoul, 157-200, Korea
 Tel: +82-2-3660-9607 / Fax: +82-2-3664-0475
 Area covered: Korea

Hong Kong FA Center

MITSUBISHI ELECTRIC AUTOMATION (HONG KONG) LTD.
 10/F, Manulife Tower, 169 Electric Road, North Point, Hong Kong
 Tel: +852-2887-8870 / Fax: +852-2887-7984
 Area covered: China

Shanghai FA Center

MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD.
 4/F Zhi Fu Plaza, No. 80 Xin Chang Road, Shanghai 200003, China
 Tel: +86-21-6121-2460 / Fax: +86-21-6121-2424
 Area covered: China

Tianjin FA Center

MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. TIANJIN OFFICE
 B-2-801/802, Youyi Building, No. 50 Youyi Road, Hexi District, Tianjin 300061, China
 Tel: +86-22-2813-1015 / Fax: +86-22-2813-1017
 Area covered: China

Beijing FA Center

MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. BEIJING OFFICE
 Unit 908, 9/F Office Tower 1, Henderson Center, 18 Jianguomennei Avenue, Dongcheng District, Beijing 100005, China
 Tel: +86-10-6518-8830 / Fax: +86-10-6518-8030
 Area covered: China

Guangzhou FA Center

MITSUBISHI ELECTRIC AUTOMATION (SHANGHAI) LTD. GUANGZHOU OFFICE
 Rm. 1609, North Tower, The Hub Center, No. 1068, Xing Gang East Road, Haizhu District, Guangzhou 510335, China
 Tel: +86-20-8923-6713 / Fax: +86-20-8923-6715
 Area covered: China

Taiwan FA Center

SETSUYO ENTERPRISE CO., LTD.
 6F No. 105 Wu-Kung 3rd RD, Wu-Ku Hsiang, Taipei Hsien, 248, Taiwan
 Tel: +886-2-2299-2499 / Fax: +886-2-2299-2509
 Area covered: Taiwan

ASEAN FA Center

MITSUBISHI ELECTRIC ASIA PTE, LTD.
 307 Alexandra Road #05-01/02 Mitsubishi Electric Building, Singapore 159943
 Tel: +65-6470-2480 / Fax: +65-6476-7439
 Area covered: Southeast Asia, India

Thailand FA Center

MITSUBISHI ELECTRIC AUTOMATION (THAILAND) CO., LTD.
 Bang-Chan Industrial Estate No. 111, Soi Serithai 54, T.Kannayao, A.Kannayao, Bangkok 10230, Thailand
 Tel: +66-2-906-3238 / Fax: +66-2-906-3239
 Area covered: Thailand

*Always refer to user's manuals for information on usable modules, restrictions, etc. before using.

*Contact your local Mitsubishi sales office or representative for the latest information on the MELSOFT versions and compatible OS.

Usable with basic model

Usable with process CPU

Usable with MELSECNET/H remote I/O

Usable with high performance model

Usable with redundant CPU

CPU, base, power supply

Product	Model	Outline	
Basic model	Q00JCPU	No. of I/O points: 256 points, no. of I/O device points: 2048 points, program capacity: 8 k steps, basic instruction processing speed (LD instruction): 0.20 μs, program memory capacity: 58 KB, 5 slots, 100 to 240 V AC input/5 V DC 3A output power supply	
	Q00CPU	No. of I/O points: 1024 points, no. of I/O device points: 2048 points, program capacity: 8 k steps, basic instruction processing speed (LD instruction): 0.16 μs, program memory capacity: 94 KB	
	Q01CPU	No. of I/O points: 1024 points, no. of I/O device points: 2048 points, program capacity: 14 k steps, basic instruction processing speed (LD instruction): 0.10 μs, program memory capacity: 94 KB	
	High performance model	Q02CPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.079 μs, program memory capacity: 112 KB
		Q02HCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 112 KB
		Q06HCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 60 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 240 KB
		Q12HCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 124 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 496 KB
		Q25HCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 252 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 1008 KB
	Process CPU	Q12PHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 124 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 496 KB
		Q25PHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 252 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 1008 KB
	Redundant CPU	Q12PRHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 124 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 496 KB
		Q25PRHCPU	No. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 252 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 1008 KB
Motion CPU	Q172CPUN	For 8-axis control	
	Q172CPUN-T	For 8-axis control, teaching module supported	
	Q173CPUN	For 32-axis control	
	Q173CPUN-T	For 32-axis control, teaching module supported	
	Q172HCPU	For 8-axis control, SSCNET III connectivity	
	Q172HCPU-T	For 8-axis control, SSCNET III connectivity, teaching module supported	
	Q173HCPU	For 32-axis control, SSCNET III connectivity	
	Q173HCPU-T	For 32-axis control, SSCNET III connectivity, teaching module supported	
Battery	Q6BAT	Replacement battery	
	Q7BAT	Replacement large-capacity battery	
	Q7BAT-SET	Large-capacity battery with battery holder for mounting CPU	
	Q8BAT	Replacement large-capacity battery module	
	Q8BAT-SET	Large-capacity battery module with CPU connection cable	
	Memory card	Q2MEM-1MBS	SRAM memory card, capacity: 1 MB
Q2MEM-2MBS		SRAM memory card, capacity: 2 MB	
Q2MEM-2MBF		Linear Flash memory card, capacity: 2 MB	
Q2MEM-4MBF		Linear Flash memory card, capacity: 4 MB	
Q2MEM-8MBA		ATA card, capacity: 8 MB	
Q2MEM-16MBA		ATA card, capacity: 16 MB	
Q2MEM-32MBA		ATA card, capacity: 32 MB	
Memory card adapter	Q2MEM-ADP	Adapter for Q2MEM memory card's standard PCMCIA slot	
SRAM card battery	Q2MEM-BAT	Replacement battery for Q2MEM-1MBS and Q2MEM-2MBS	
Connection cable	QC30R2	RS-232 cable for connecting personal computer and CPU, 3 m (between mini-DIN6P and Dsub9P)	
	QC10TR	1 m cable for tracking	
	QC30TR	3 m cable for tracking	
Cable disconnection prevention holder	Q6HLD-R2	Holder for preventing RS-232 cable (programmable controller CPU connection) disconnection	



CPU, base, power supply

Product	Model	Outline	
Base	Main base	Q33B 3 slots, 1 power supply module required, for Q Series modules	
		Q35B 5 slots, 1 power supply module required, for Q Series modules	
		Q38B 8 slots, 1 power supply module required, for Q Series modules	
		Q312B 12 slots, 1 power supply module required, for Q Series modules	
	Slim type base	Q32SB 2 slots, 1 slim type power supply module required, for Q Series modules	
		Q33SB 3 slots, 1 slim type power supply module required, for Q Series modules	
		Q35SB 5 slots, 1 slim type power supply module required, for Q Series modules	
	Redundant power main base	Q38RB 8 slots, 2 redundant power supply modules required, for Q Series modules	
	Extension base	Q63B 3 slots, 1 power supply module required, for Q Series modules	
		Q65B 5 slots, 1 power supply module required, for Q Series modules	
		Q68B 8 slots, 1 power supply module required, for Q Series modules	
		Q612B 12 slots, 1 power supply module required, for Q Series modules	
		Q52B 2 slots, power supply module not required, for Q Series modules	
		Q55B 5 slots, power supply module not required, for Q Series modules	
		QA1S65B (Note 1) 5 slots, 1 AnS Series power supply module required, for AnS Series modules	
		QA1S68B (Note 1) 8 slots, 1 AnS Series power supply module required, for AnS Series modules	
		QA65B (Note 1) 5 slots, 1 A Series power supply module required, for A Series modules	
		QA68B (Note 1) 8 slots, 1 A Series power supply module required, for A Series modules	
		Redundant power extension base	Q68RB 8 slots, 2 redundant power supply modules required, for Q Series modules
		Redundant type extension base	Q65WRB 5 slots, 2 redundant power supply modules required, for Q Series modules
		Extension cable	QC05B 0.45 m cable for connecting extension base unit
			QC06B 0.6 m cable for connecting extension base unit
			QC12B 1.2 m cable for connecting extension base unit
			QC30B 3 m cable for connecting extension base unit
	QC50B 5 m cable for connecting extension base unit		
	QC100B 10 m cable for connecting extension base unit		
	Adapter	Q6DIN1 DIN rail mounting adapter for Q38B, Q312B, Q68B, Q612B, Q38RB, Q68RB, Q65WRB, Q38DB, and Q312DB	
		Q6DIN2 DIN rail mounting adapter for Q35B, Q65B, and Q00JCPU	
		Q6DIN3 DIN rail mounting adapter for Q32SB, Q33SB, Q35SB, Q33B, Q52B, Q55B, and Q63B	
		Q6DIN1A DIN rail mounting adapter (with vibration-proofing bracket set) for Q3□B, Q5□B, Q6□B, Q38RB, Q68RB, and Q65WRB	
	Blank cover	QG60 Blank cover for I/O slot	
	Power supply	Q61P Input voltage: 100 to 240 V AC, output voltage: 5 V DC, output current: 6 A	
		Q61P-A1 Input voltage: 100 to 120 V AC, output voltage: 5 V DC, output current: 6 A	
Q61P-A2 Input voltage: 200 to 240 V AC, output voltage: 5 V DC, output current: 6 A			
Q62P Input voltage: 100 to 240 V AC, output voltage: 5/24 V DC, output current: 3/0.6 A			
Q63P Input voltage: 24 V DC, output voltage: 5 V DC, output current: 6 A			
Q64PN New Input voltage: 100 to 240 V AC, output voltage: 5 V DC, output current: 8.5 A			
Slim type power supply	Q61SP Input voltage range: 100 to 240 V AC, output voltage: 5 V DC, output current: 2 A		
Redundant power supply	Q63RP Input voltage: 24 V DC, output voltage: 5 V DC, output current: 8.5 A		
	Q64RP Input voltage: 100 to 120/200 to 240 V AC, output voltage: 5 V DC, output current: 8.5 A		

Usable at the second to seventh extension base stage.

I/O module

Product	Model	Outline
Input	AC	QX10 16 points, 100 to 120 V AC, 8 mA (100 V AC, 60 Hz)/7 mA (100 V AC, 50 Hz), response time: 20 ms, 16 points/common, 18-point terminal block
		QX28 8 points, 100 to 240 V AC, 17 mA (200 V AC, 60 Hz)/14 mA (200 V AC, 50 Hz)/8 mA (100 V AC, 60 Hz)/ 7 mA (100 V AC, 50 Hz), response time: 20 ms, 8 points/common, 18-point terminal block
	DC (Positive common) (Note 2)	QX40 16 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 16 points/common, positive common, 18-point terminal block
		QX40-S1 16 points, 24 V DC, 6 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 16 points/common, positive common, 18-point terminal block
		QX41 (Note 3) 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common, 40-pin connector
		QX41-S1 (Note 3) 32 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, positive common, 40-pin connector
		QX42 (Note 3) 64 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common, 40-pin connector
	QX42-S1 (Note 3) 64 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, positive common, 40-pin connector	
	AC/DC (Note 2)	QX50 16 points, 48 V AC/DC, 4 mA, response time: 20 ms, 16 points/common, positive/negative common, 18-point terminal block
	DC sensor (Note 2)	QX70 16 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 16 points/common, positive/negative common, 18-point terminal block
		QX71 (Note 3) 32 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 32 points/common, positive/negative common, 40-pin connector
	DC (Negative common) (Note 2)	QX72 (Note 3) 64 points, 5/12 V DC, 1.2 mA (5 V DC)/3.3 mA (12 V DC), response time: 1/5/10/20/70 ms, 32 points/common, positive/negative common, 40-pin connector
		QX80 16 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 16 points/common, negative common, 18-point terminal block
		QX81 (Note 4) 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, negative common, 37-pin D-sub connector
QX82 (Note 3) 64 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, negative common, 40-pin connector		
Output	QX82-S1 (Note 3) 64 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 32 points/common, negative common, 40-pin connector	
	QY10 16 points, 24 V DC/240 V AC, 2 A/point, 8 A/common, response time: 12 ms, 16 points/common, 18-point terminal block	
	Relay	QY18A 8 points, 24 V DC/240 V AC, 2 A/point, response time: 12 ms, 18-point terminal block, all points independent
	Triac	QY22 16 points; 100 to 240 V AC; 0.6 A/point; 4.8 A/common; minimum load voltage/current: 24 V AC/100 mA, 100 to 240 V AC/25 mA; response time: 1 ms + 0.5 cycle, 16 points/common, 18-point terminal block, with surge suppressor
	Transistor (Sink)	QY40P 16 points, 12 to 24 V DC, 0.1 A/point, 1.6 A/common, response time: 1 ms, 16 points/common, sink type, 18-point terminal block, with thermal and short-circuit protection and surge suppressor
		QY41P (Note 3) 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal and short-circuit protection and surge suppressor
		QY42P (Note 3) 64 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type, 40-pin connector, with thermal and short-circuit protection and surge suppressor
	QY50 16 points, 12 to 24 V DC, 0.5 A/point, 4 A/common, response time: 1 ms, 16 points/common, sink type, 18-point terminal block, with surge suppressor and fuse	
	Transistor (Independent)	QY68A 8 points, 5 to 24 V DC, 2 A/point, 8 A/module, response time: 10 ms, sink/source type, 18-point terminal block, with surge suppressor, all points independent
	TTL CMOS	QY70 16 points, 5 to 12 V DC, 16 mA/point, 256 mA/common, response time: 0.5 ms, 16 points/common, sink type, 18-point terminal block, with fuse
QY71 (Note 3) 32 points, 5 to 12 V DC, 16 mA/point, 512 mA/common, response time: 0.5 ms, 32 points/common, sink type, 40-pin connector, with fuse		
Transistor (Source)	QY80 16 points, 12 to 24 V DC, 0.5 A/point, 4 A/common, response time: 1 ms, 16 points/common, source type, 18-point terminal block, with surge suppressor and fuse	
	QY81P (Note 4) 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, source type, 37-pin D-sub connector, with thermal and short-circuit protection and surge suppressor	
I/O	DC input/transistor output	QH42P (Note 3) Input: 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common; output: 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type; 40-pin connector, with thermal and short-circuit protection and surge suppressor
		QX48Y57 Input: 8 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 8 points/common, positive common; output: 7 points, 12 to 24 V DC, 0.5 A/point, 2 A/common, response time: 1 ms, 7 points/common, sink type; 18 points terminal block, with surge suppressor and fuse
		QX41Y41P (Note 3) New Input: 32 points, 24 V DC, 4 mA, response time: 1/5/10/20/70 ms, 32 points/common, positive common; output: 32 points, 12 to 24 V DC, 0.1 A/point, 2 A/common, response time: 1 ms, 32 points/common, sink type; 40-pin connector, with thermal and short-circuit protection and surge suppressor
Interrupt module	QI60 16 points, 24 V DC, 4 mA, response time: 0.1/0.2/0.4/0.6/1 ms, 16 points/common, 18-point terminal block	
Connector	A6CON1 40-pin connector, soldering type	
	A6CON2 40-pin connector, crimp-contact type	
	A6CON3 40-pin connector, IDC for flat cables	
	A6CON4 40-pin connector, soldering type (cable connectable in bidirection)	
	A6CON1E 37-pin D-sub connector, soldering type	
	A6CON2E 37-pin D-sub connector, crimp-contact type	
	A6CON3E 37-pin D-sub connector, IDC for flat cables	



I/O module

Product	Model	Outline	
Spring clamp terminal block	Q6TE-18S	For 16-point I/O modules, 0.3 to 1.5 mm ² (22 to 16 AWG)	
Terminal block adapter	Q6TA32	For 32-point I/O modules, 0.5 mm ² (20 AWG)	
	Q6TA32-TOL	Q6TA32 dedicated tool	
Connector/terminal block conversion module	A6TBXY36	For positive common input modules and sink output modules (standard type)	
	A6TBXY54	For positive common input modules and sink output modules (2-wire type)	
	A6TBX70	For positive common input modules (3-wire type)	
	A6TBX36-E	For negative common input modules (standard type)	
	A6TBX54-E	For negative common input modules (2-wire type)	
	A6TBX70-E	For negative common input modules (3-wire type)	
	A6TBY36-E	For source output modules (standard type)	
	A6TBY54-E	For source output modules (2-wire type)	
	Cable	AC05TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 0.5 m
		AC10TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 1 m
		AC20TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 2 m
		AC30TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 3 m
		AC50TB	For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 5 m
AC80TB		For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 8 m *Common power supply 0.5 A or lower	
AC100TB		For A6TBXY36, A6TBXY54, and A6TBX70 (positive common/sink type); 10 m *Common power supply 0.5 A or lower	
AC05TB-E		For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 0.5 m	
AC10TB-E		For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 1 m	
AC20TB-E		For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 2 m	
AC30TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 3 m		
AC50TB-E	For A6TBX36-E, A6TBY36-E, A6TBX54-E, A6TBY54-E, and A6TBX70-E (negative common/source type); 5 m		
Relay terminal module	A6TE2-16SRN	For 40-pin connector 24 V DC transistor output modules (sink type)	
Cable	AC06TE	For A6TE2-16SRN, 0.6 m	
	AC10TE	For A6TE2-16SRN, 1 m	
	AC30TE	For A6TE2-16SRN, 3 m	
	AC50TE	For A6TE2-16SRN, 5 m	
	AC100TE	For A6TE2-16SRN, 10 m	

Analog I/O module

Product	Model	Outline	
Analog input	Voltage input	Q68ADV	8 channels; input: -10 to 10 V DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block
	Current input	Q62AD-DGH	2 channels; input: 4 to 20 mA DC; output (resolution): 0 to 32000, 0 to 64000; conversion speed: 10 ms/2 channels; 18-point terminal block; channel isolated; supplies power to 2-wire transmitter
		Q66AD-DG (Note 6)	6 channels; input: 4 to 20 mA DC (when 2-wire transmitter is connected), 0 to 20 mA DC; output (resolution): 0 to 4000, 0 to 12000; conversion speed: 10 ms/channel; 40-pin connector; channel isolated; supplies power to 2-wire transmitter
		Q68ADI	8 channels; input: 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block
	Voltage/current input	Q64AD	4 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 80 μs/channel; 18-point terminal block
		Q64AD-GH	4 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 32000, -32000 to 32000, 0 to 64000, -64000 to 64000; conversion speed: 10 μs/4 channels; 18-point terminal block, channel isolated
Q68AD-G (Note 6)		8 channels; input: -10 to 10 V DC, 0 to 20 mA DC; output (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, 0 to 16000, -16000 to 16000; conversion speed: 10 ms/channel; 40-pin connector, channel isolated	
Analog output	Voltage output	Q68DAVN	8 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
	Current output	Q68DAIN	8 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000; output: 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
	Voltage/current output	Q62DAN	2 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC, 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block, transformer isolation between power supply and output
		Q62DA-FG	2 channels; input (resolution): 0 to 12000, -12000 to 12000, -16000 to 16000; output: -12 to 12 V DC, 0 to 22 mA DC; conversion speed: 10 ms/2 channels; 18-point terminal block; channel isolated
		Q64DAN	4 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -10 to 10 V DC, 0 to 20 mA DC; conversion speed: 80 μs/channel; 18-point terminal block; transformer isolation between power supply and output
	Q66DA-G (Note 6)	6 channels; input (resolution): 0 to 4000, -4000 to 4000, 0 to 12000, -12000 to 12000, -16000 to 16000; output: -12 to 12 V DC, 0 to 22 mA DC; conversion speed: 6 ms/channel; 40-pin connector; channel isolated	
Temperature input	RTD	Q64RD	4 channels, platinum RTD (Pt100 [JIS C1604-1997, IEC 751 1983], JPt100 [JIS C1604-1981]), conversion speed: 40 ms/channel, 18-point terminal block
		Q64RD-G	4 channels, platinum RTD (Pt100 [JIS C1604-1997, IEC 751 1983], JPt100 [JIS C1604-1981], Ni100Ω [DIN43760 1987]), conversion speed: 40 ms/channel, 18-point terminal block, channel isolated
	Thermocouple	Q64TD	4 channels, thermocouple (JIS C1602-1995), conversion speed: 40 ms/channel, 18-point terminal block
		Q64TDV-GH	4 channels, thermocouple (JIS C1602-1995), micro voltage (-100 to 100 mV), conversion speed: sampling cycle x 3, sampling cycle: 20 ms/channel, 18-point terminal block
Temperature control	Platinum RTD	Q64TCRT	4 channels, platinum RTD (Pt100, JPt100), no heater disconnection detection, sampling cycle: 0.5 s/4 channels, 18-point terminal block
		Q64TCRTBW	4 channels, platinum RTD (Pt100, JPt100), with heater disconnection detection, sampling cycle: 0.5 s/4 channels, two 18-point terminal blocks
	Thermocouple	Q64TCTT	4 channels, thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), no heater disconnection detection, sampling cycle: 0.5 s/4 channels, 18-point terminal block
		Q64TCTTBW	4 channels, thermocouple (K, J, T, B, S, E, R, N, U, L, PLII, W5Re/W26Re), with heater disconnection detection, sampling cycle: 0.5 s/4 channels, two 18-point terminal blocks
Loop control	Q62HLC	2 channels, input: thermocouple/micro voltage/voltage/current, conversion speed (input): 25 ms/2 channels, sampling cycle: 25 ms/2 channels; output: 4 to 20 mA DC, conversion speed (output): 25 ms/2 channels; 18-point terminal block with 5 PID control modes	

Interrupt pointer and intelligent function module dedicated instructions cannot be used.

Mountable on the extension base unit only.



Pulse I/O and positioning module

Product	Model	Outline	
Channel isolated pulse input 	QD60P8-G	8 channels, 30 kpps/10 kpps/1 kpps/ 100 pps/ 50 pps/ 10 pps/ 1 pps/0.1 pps, count input signal: 5/12 to 24 V DC	
High-speed counter 	QD62 (Note 3)	2 channels; 200/100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector	
	QD62D (Note 3)	2 channels; 500/200/100/10 kpps; count input signal: EIA standards RS-422-A (differential line driver), external input: 5/12/24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector	
	QD62E (Note 3)	2 channels; 200/100/10 kpps; count input signal: 5/12/24 V DC; external input: 5/12/24 V DC; coincidence output: transistor (source), 12/24 V DC, 0.1 A/point, 0.4 A/common; 40-pin connector	
	QD63P6 (Note 5)	6 channels, 200/100/10 kpps, count input signal: 5 V DC, 40-pin connector	
	QD64D2 (Note 5) New	2 channels; 4 Mpps; count input signal: EIA standards RS-422-A (differential line driver); external input: 24 V DC; coincidence output: transistor (sink), 12/24 V DC, 0.5 A/point, 2 A/common; 40-pin connector	
Positioning	Open collector output (Note 5) 	QD75P1 	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD75P2 	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD75P4 	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 200 kpps; 40-pin connector
		QD70P4 	4 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 200 kpps, 40-pin connector
		QD70P8 	8 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 200 kpps, 40-pin connector
	Differential output (Note 5) 	QD75D1 	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD75D2 	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD75D4 	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; max. output pulse: 1 Mpps; 40-pin connector
		QD70D4 	4 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 4 Mpps, 40-pin connector
		QD70D8 	8 axes, control unit: pulse, no. of positioning data: 10/axis, max. output pulse: 4 Mpps, 40-pin connector
	With SSCNET connectivity (Note 3) 	QD75M1 	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
		QD75M2 	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
	With SSCNET III connectivity (Note 3) 	QD75M4 	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector
		QD75MH1 	1 axis; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
		QD75MH2 	2 axes; 2-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
	Open collector output with built-in counter function (Note 5) 	QD75MH4 	4 axes; 2-/3-/4-axis linear interpolation, 2-axis circular interpolation; control unit: mm, inch, degree, pulse; no. of positioning data: 600/axis; 40-pin connector; with SSCNET III connectivity
		QD72P3C3 	Positioning: 3 axes, control unit: pulse, no. of positioning data: 1/axis, max. output pulse: 100 kpps, counter: 3 channels, 100 kpps, count input signal: 5/24 V DC, 40-pin connector

Interrupt pointer and intelligent function module dedicated instructions cannot be used.

Mountable on the extension base unit only.

Information module

Product	Model	Outline
MES interface 	QJ71MES96	MES interface module *MX MESInterface and CompactFlash card are required.
	Option	GT05-MEM-128MC 128 MB CompactFlash card GT05-MEM-256MC 256 MB CompactFlash card
Ethernet 	QJ71E71-100	10BASE-T/100BASE-TX
	QJ71E71-B2	10BASE2
	QJ71E71-B5	10BASE5
Serial communication 	QJ71C24N	RS-232: 1 channel, RS-422/485: 1 channel, total transmission speed of 2 channels: 230.4 kbps
	QJ71C24N-R2	RS-232: 2 channels, total transmission speed of 2 channels: 230.4 kbps
	QJ71C24N-R4	RS-422/485: 2 channels, total transmission speed of 2 channels: 230.4 kbps
Intelligent communication 	QD51	BASIC program execution module, RS-232: 2 channels
	QD51-R24	BASIC program execution module, RS-232: 1 channel, RS-422/485: 1 channel
	SW <input type="checkbox"/> IVD-AD51HP (Note 7)	Software package for QD51, AD51H-S3, and A1SD51S

Control network module

MELSEC NET/H 	SI/QSI fiber optic cable	QJ71LP21-25 	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote mater station)
		QJ71LP21S-25 	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote mater station), with external power supply function
		QJ72LP25-25	SI/QSI/H-PCF/ broadband H-PCF fiber optic cable, dual loop, remote I/O network (remote I/O station)
	GI-50/125 fiber optic cable	QJ71LP21G 	GI-50/125 fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote master station)
		QJ72LP25G	GI-50/125 fiber optic cable, dual loop, remote I/O network (remote I/O station)
	GI-62.5/125 fiber optic cable	QJ71LP21GE 	GI-62.5/125 fiber optic cable, dual loop, controller network (control/normal station) or remote I/O network (remote master station)
QJ72LP25GE		GI-62.5/125 fiber optic cable, dual loop, remote I/O network (remote I/O station)	
Coaxial cable	QJ71BR11 	3C-2V/5C-2V coaxial cable, single bus, controller network (control/normal station) or remote I/O network (remote master station)	
	QJ72BR15	3C-2V/5C-2V coaxial cable, single bus, remote I/O network (remote I/O station)	
CC-Link 	QJ61BT11N	Master/local station, CC-Link Ver. 2 compatible	
CC-Link/LT 	QJ61CL12	Master station	
FL-net (OPCN-2) 	Ver. 2	QJ71FL71-T-F01	10BASE-T
		QJ71FL71-B2-F01	10BASE-2
	Ver. 1	QJ71FL71-B5-F01	10BASE-5
		QJ71FL71-T	10BASE-T
AS-i 	QJ71AS92	QJ71FL71-B2	10BASE-2
		QJ71FL71-B5	10BASE-5
AS-i	QJ71AS92	Master station, AS-Interface Specification Version 2.11 compatible	

Interrupt pointer and intelligent function module dedicated instructions cannot be used.

Interrupt pointer, intelligent function module dedicated instructions, and E-mail function cannot be used.

Mountable on the extension base unit only.

Mountable on the main base unit only.



A mode CPU, base

Product		Model	Outline
CPU		Q02CPU-A	For A mode, no. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.079 μs, program memory capacity: 144 KB
		Q02HCPU-A	For A mode, no. of I/O points: 4096 points, no. of I/O device points: 8192 points, program capacity: 28 k steps, basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 144 KB
		Q06HCPU-A	For A mode; no. of I/O points: 4096 points; no. of I/O device points: 8192 points; program capacity: 30 k steps (main), 30 k steps (sub); basic instruction processing speed (LD instruction): 0.034 μs, program memory capacity: 144 KB
Base	Main base	QA1S33B	3 slots, 1 AnS Series power supply module required, for AnS Series modules
		QA1S35B	5 slots, 1 AnS Series power supply module required, for AnS Series modules
		QA1S38B	8 slots, 1 AnS Series power supply module required, for AnS Series modules
	Extension base	QA1S65B	5 slots, 1 AnS Series power supply module required, for AnS Series modules
		QA1S68B	8 slots, 1 AnS Series power supply module required, for AnS Series modules

MELSOFT GX Series

GX Developer	SW□D5C-GPPW-E	MELSEC programmable controller programming software
	SW□D5C-GPPW-EV	MELSEC programmable controller programming software (upgrade)
GX Simulator	SW□D5C-LLT-E	MELSEC programmable controller simulation software
	SW□D5C-LLT-EV	MELSEC programmable controller simulation software (upgrade)
GX Explorer	SW□D5C-EXP-E	Maintenance tool
GX Converter	SW□D5C-CNVW-E	Excel/text data converter
GX Configurator-AD (Note 8)	SW□D5C-QADU-E	MELSEC-Q dedicated analog to digital conversion module setting/monitoring tool
GX Configurator-DA (Note 8)	SW□D5C-QDAU-E	MELSEC-Q dedicated digital to analog conversion module setting/monitoring tool
GX Configurator-SC (Note 8)	SW□D5C-QSCU-E	MELSEC-Q dedicated serial communication module setting/monitoring tool
GX Configurator-CT (Note 8)	SW□D5C-QCTU-E	MELSEC-Q dedicated high-speed counter module setting/monitoring tool
GX Configurator-TC (Note 8)	SW□D5C-QTCU-E	MELSEC-Q dedicated temperature control module setting/monitoring tool
GX Configurator-TI (Note 8)	SW□D5C-QTIU-E	MELSEC-Q dedicated temperature input module setting/monitoring tool
GX Configurator-FL (Note 8)	SW□D5C-QFLU-E	MELSEC-Q dedicated FL-net module setting/monitoring tool
GX Configurator-PT (Note 8)	SW□D5C-QPTU-E	MELSEC-Q dedicated positioning module QD70 setting/monitoring tool
GX Configurator-AS (Note 8)	SW□D5C-QASU-E	MELSEC-Q dedicated AS-i master module setting/monitoring tool
GX Configurator-QP (Note 8)	SW□D5C-QD75P-E	MELSEC-Q dedicated positioning module QD75P/D/M setting/monitoring tool
GX Configurator-CC	SW□D5C-J61P-E	CC-Link module setting/monitoring tool
GX RemoteService-I	SW□D5C-RAS-E	Remote access tool
GX Works	SW□D5C-QSET-E	A set of seven products: GX Developer, GX Simulator, GX Explorer, GX Configurator-AD, DA, SC, CT
	SW□D5C-GPPLT-E	A set of three products: GX Developer, GX Simulator, GX Explorer

MELSOFT PX Series

PX Developer (Note 8)	SW□D5C-FBDQ-E	Process control FBD software package
PX Works	SW□D5C-FBDGPP-E	A set of six products: PX Developer, GX Developer, GX Configurator-AD, DA, CT, TI

MELSOFT MX Series

MX Component	SW□D5C-ACT-E	ActiveX library for communication
MX Sheet	SW□D5C-SHEET-E	Excel communication support tool
MX MESInterface	SW1DNC-MESIF-E	MES interface module QJ1MES96 dedicated information linkage tool
MX Works	SW□D5C-SHEETSET-E	A set of two products: MX Component, MX Sheet

MELSOFT MT Series

MT Developer	SW□RNC-GSVPROE	Integrated start-up support software for Q Series motion controllers
	SW□RNC-GSVSETE	Integrated start-up support software for Q Series motion controllers, A30CD-PCF (SSC I/F card), Q170CDCBL03M cable

MELSOFT MR Series

MR Configurator (Note 9)	MRZJW3-SETUP221	Servo setup software for PC
--------------------------	-----------------	-----------------------------

PC interface board

Product		Model	Outline
MELSEC NET/H (10)	SI/QSI fiber optic cable	Q80BD-J71LP21-25	PCI bus, Japanese/English OS compatible, SI/QSI/H-PCF/broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station)
		Q80BD-J71LP21S-25	PCI bus, Japanese/English OS compatible, SI/QSI/H-PCF/broadband H-PCF fiber optic cable, dual loop, controller network (control/normal station), with external power supply function
	GI-50/125 fiber optic cable	Q80BD-J71LP21G	PCI bus, Japanese/English OS compatible, GI-50/125 fiber optic cable, dual loop, controller network (control/normal station)
	GI-62.5/125 fiber optic cable	Q80BD-J71LP21GE	PCI bus, Japanese/English OS compatible, GI-62.5/125 fiber optic cable, dual loop, controller network (control/normal station)
	Coaxial cable	Q80BD-J71BR11	PCI bus, Japanese/English OS compatible, 3C-2V/5C-2V coaxial cable, single bus, controller network (control/normal station)
CC-Link	Q80BD-J61BT11N	PCI bus, Japanese/English OS compatible, master/local interface board, CC-Link Ver. 2 compatible	

- Note 1) Compatible with the high performance model only.
 Note 2) "Positive common" means using the module by connecting the common terminal to positive DC power; "negative common" means using the module by connecting the common terminal to negative DC power.
 Note 3) The connector is not enclosed. Prepare A6CON1, A6CON2, A6CON3, or A6CON4 separately.
 Note 4) The connector is not enclosed. Prepare A6CON1E, A6CON2E, or A6CON3E separately.
 Note 5) The connector is not enclosed. Prepare A6CON1, A6CON2, or A6CON4 separately.
 Note 6) The connector is not enclosed. Prepare A6CON4 separately.
 Note 7) Runs in Windows command prompt.
 Note 8) Not compatible with the A mode.
 Note 9) MRZJW3-SETUP211 does not support MR-J3-500A or later and MR-J3-B. Use MRZJW3-SETUP221 or later.
 Note 10) Depending on the combination of the power supply module and base unit, the mounting position (slot) of Q68TD-G-H01 is restricted. Refer to the manual for more details.